


CDCK

Eco ceiling fans

Physical specification

All measurements in millimetres.

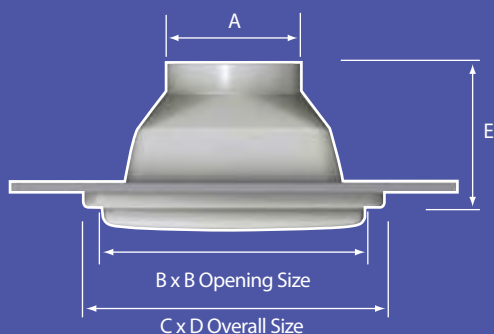

Side

| | 6" | 9" | 12" |
|---|-----|-----|-----|
| A | 200 | 250 | 350 |
| B | 270 | 340 | 430 |
| C | 300 | 405 | 495 |
| D | 335 | 425 | 510 |
| E | 215 | 215 | 235 |

| | | |
|----------------|--------|--------|
| Weight: | CD6CK | 2.6 kg |
| | CD9CK | 3.7 kg |
| | CD12CK | 5.2 kg |

Features

- Complete kit designed for ceiling installation
- Picture frame adaptor for retro fit installation
- Fan can be disconnected with ease for replacement
- Thermoactuated backdraught shutters ensures silent operation and positive closure when fan is off
- Choice of controllers, remote and integral sensors
- Kit contains 2 mounting plates, M5 screws and locking nuts
- 6", 9" and 12" models available

Controls

| Model | Operation |
|--------|--|
| CD6CK | 6" ceiling kit |
| CD9CK | 9" ceiling kit |
| CD12CK | 12" ceiling kit |
| RC4 | Switch controller with on/off, forward reverse, variable speed and auto/manual functions |

Installation

Wiring: Must comply with IEE Regulations, see wiring diagrams on page 130.


Cable: 1mm² Ø max or min.

Fuse: 3 amp (when fan is supplied from a 6A lighting circuit no local fuse is required).

Performance

| Model | Performance to BS 848 Pt1 in free air (m³.h⁻¹) | | Sound Pressure level @ 3m dB(A) | | Consumption (W) | |
|--------|--|------|---------------------------------|-----|-----------------|-----|
| | Boost | Eco | Boost | Eco | Boost | Eco |
| CD6CK | 470 | 222 | 47 | 30 | 38 | 20 |
| CD9CK | 933 | 804 | 48 | 44 | 50 | 37 |
| CD12CK | 1836 | 1395 | 50 | 43 | 100 | 70 |

Note: figures are extract only.

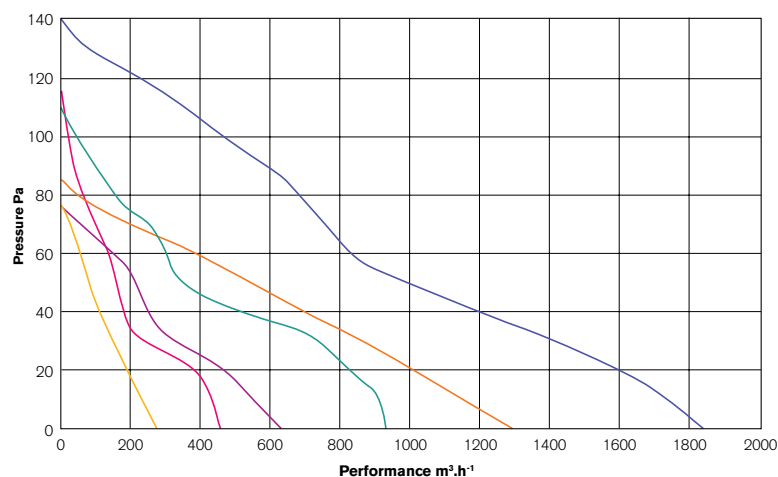

CD6 Extract CD9 Extract CD12 Extract
CD6 Supply CD9 Supply CD12 Supply

Electrical Specification: 230V~50Hz Class I
Consumption:

| | | |
|--------|------------|----------|
| CD6CK | Boost 38W | Eco 20 W |
| CD9CK | Boost 50W | Eco 37 W |
| CD12CK | Boost 100W | Eco 70 W |

Specification



2 YEAR GUARANTEE

Eco: Commercial

Ancillaries

Eco switch



RC4 Remote switch – on/off, forward/reverse, variable speed, eco/boost, auto/manual.

Remote sensor options:

HHR Remote humidity sensor.

AQR Remote air quality sensor.

PIRR Remote PIR sensor.

THR Remote temperature sensor.

TAR Remote overrun timer.

Integral sensor options

HH6/HH9/HH12 Integral humidistat.

AQ6/AQ9/AQ12 Integral air quality sensor.

PIR6/PIR9/PIR12 Integral PIR sensor.

TH6/TH9/TH12 Integral temperature sensor.

TA6/TA9/TA12 Integral overrun timer.

EFR Extended fixing rods.

