


CDRE

Refurbishment wall fans

Physical specification

All measurements in millimetres.

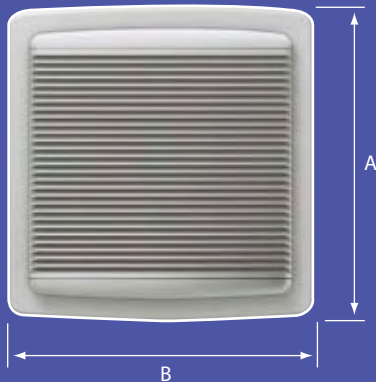

Front



Side

	6"	9"	12"
A	330	405	495
B	335	425	510
C	170	175	196

Weight:	CD6RE	3.7 kg
	CD9RE	5.13 kg
	CD12RE	6.85 kg

Features

- Designed to fix to existing T Series or Greenwood wall liners
- No drilling or plugging required
- Can utilise existing T series, Rangemaster or Ecotronic Controllers
- Thermoactuated backdraught shutters ensures silent operation and positive closure when fan is off
- Supplied complete with bracket and picture frame mount
- Reversible supply or extract, variable speed operation
- Choice of controllers, remote and integral sensors
- 6", 9" and 12" models available

Controls

Model	Operation
CD9RE	6" refurb wall kit
CD6RE	9" refurb wall kit
CD12RE	12" refurb wall kit
RC4	Switch controller with on/off, forward reverse, variable speed and auto/manual functions

Installation

Wiring: Must comply with IEE Regulations, see wiring diagrams on page 130.


Cable: 1mm² Ø max or min.

Fuse: 3 amp (when fan is supplied from a 6A lighting circuit no local fuse is required).

Performance

Model	Performance to BS 848 Pt1 in free air (m ³ .h ⁻¹)		Sound Pressure level @ 3m dB(A)		Consumption (W)	
	Boost	Eco	Boost	Eco	Boost	Eco
CD6RE	445	245	45	27	38	20
CD9RE	918	820	49	46	50	37
CD12RE	1820	1341	51	45	100	70

Note: figures are extract only

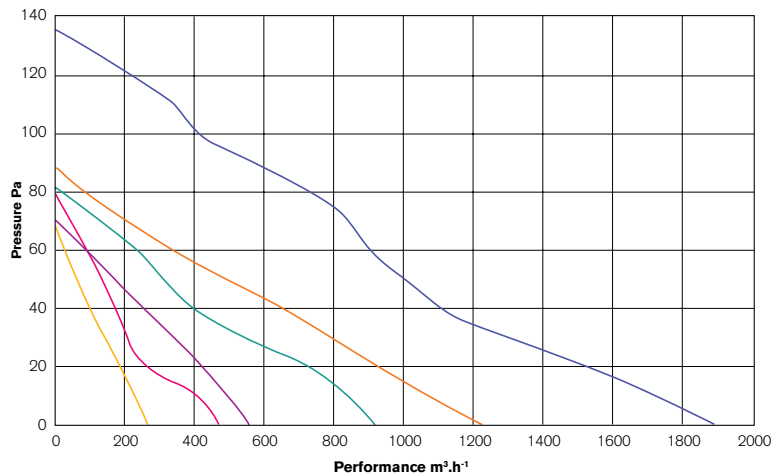

CD6 Extract — CD9 Extract — CD12 Extract —
 CD6 Supply — CD9 Supply — CD12 Supply —

Electrical Specification: 230V~50Hz Class I
 Consumption:
 CD6RE Boost 38W Eco 20 W
 CD9RE Boost 50W Eco 37 W
 CD12RE Boost 100W Eco 70 W

Specification



2 YEAR GUARANTEE

Ancillaries

Eco switch



RC4 Remote switch – on/off, forward/reverse, variable speed, eco/boost, auto/manual.

Remote sensor options:

HHR Remote humidity sensor.

AQR Remote air quality sensor.

PIRR Remote PIR sensor.

THR Remote temperature sensor.

TAR Remote overrun timer.

Integral sensor options

HH6/HH9/HH12 Integral humidistat.

AQ6/AQ9/AQ12 Integral air quality sensor.

PIR6/PIR9/PIR12 Integral PIR sensor.

TH6/TH9/TH12 Integral temperature sensor.

TA6/TA9/TA12 Integral overrun timer.

EFR Extended fixing rods.

